

■ **Features**

- Absolute Supply Voltage: 200-528Vac or 250-740Vdc
- Great Surge Immunity 10kV
- 95% Efficiency
- Low Inrush Current Option
- 100,000Hour Life @ Tc=75°C
- 7 Year Warranty @ Tc<=75°C
- NFC Programmability and Isolated Dimming
- +/-2% Output Current Accuracy (Programmable Model)
- 0-10V/PWM/Time/DALI /DMX (Optional) Dimmable
- Dim Off with 0.5W Standby Power
- 12V 300mA Auxiliary Power to Power Controllers and Fans
- UL Class P, ENEC/CB/CCC SELV Output
- Safety according to EN 61347-1, 61347-2-3, 61347-2-13, 623847



■ **Model List** (See appendix for more details about the operation range)

Model Number	Input Voltage Range	Output Power	Output Voltage	Full Power Settable Current Min	Full Power Settable Current Max	Certification (To be done)
TLD-600-C12A-XYU	200-528Vac	600 W	See the operation curve in last page	10A	12.5A	UL/FCC
TLD-600-C860-XYU	200-528Vac	600 W		6A	8.6A	UL/FCC
TLD-600-C600-XYU	200-528Vac	600 W		4.2A	6A	UL/FCC
TLD-600-C420-XYU	200-528Vac	600 W		2.8A	4.2A	UL/FCC
TLD-600-C12A-XYS	200-528Vac	600 W		10A	12.5A	CB/ENEC/CCC
TLD-600-C830-XYS	200-528Vac	600 W		6A	8.6A	CB/ENEC/CCC
TLD-600-C600-XYS	200-528Vac	600 W		4.2A	6A	CB/ENEC/CCC
TLD-600-C420-XYS	200-528Vac	600 W		2.8A	4.2A	CB/ENEC/CCC

XY=	Dimming Method	Programmable	12Vaux	Dim-off
NN	-	-	-	-
DN	0-10V	-	-	-
EN	0-10V	-	√	√
TR	Time/Set Current	√	-	-
DR	0-10V	√	-	-
ER	0-10V/PWM/Time	√	√	√
AR	DALI	√	-	√

■ Technical Data

Input Voltage	200-528Vac or 250-740Vdc
Input Frequency	47~63Hz
Power Factor	>0.9@60-100%load, refer to PF vs. Load curve
THD	<15%@60-100%load, refer to THD vs. Load curve
Input Current	2.4Amax@277Vac & Full-Load, 1.4Amax@480Vac & Full-Load
Inrush Current	15A peak, 3.2ms duration, <0.25A2s@277Vac, Cold Start 20A peak, 3.3ms duration, <0.5A2s@480Vac, Cold Start
Leakage Current	1mA max @277Vac 60Hz, UL8750,0.75mA max @220Vac 50Hz, IEC61347-1
Input Under Voltage	Shut down and auto-restart
Input Over Voltage	*Optional: Shutdown @320Vac
Surge Protection	Line to line 6kV, line to ground 10kV, IEC 61000-4-5
Current Accuracy	±5%lo
Ripple Current	Ip-p:5%lo max
Setup Time	1.2s max
Overshoot	10% Io max & LED Load
Output Over Voltage	110% Vomax, typ.
Short Circuit	Auto recovery. The output recovers when short is removed.
Over Temperature	Lower the output current when $T_c \cong 105 \pm 10^\circ\text{C}$; Auto Recovery When $T_c \cong 70 \pm 10^\circ\text{C}$
Auxiliary Power (Vaux)	12V+/-5%, 300mA max
Operating Temperature	Case Temperature $T_c = -40^\circ\text{C} \sim +90^\circ\text{C}$; 10%RH~100%RH
Storage Temperature	$-40^\circ\text{C} \sim +85^\circ\text{C}$; 5%RH~100%RH
MTBF	≥280,000 hours, 75°C case temperature (MIL-HDBK-217F)
Lifetime	≥100,000 hours, 75°C case temperature, refer to life vs. Tc curve
Case Temperature	90°C max, marked in the Tc point of label
Dimensions	9.33x4.92x1.93 by inch (body), 10.3x4.92x1.93 by inch (endcaps included) 237 x 125 x 49 by mm (body), 262 x 125 x 49 by mm (endcaps included)
Net Weight	2200g
Packing	8pcs/Cartron/20.5kg, 490x370x250mm

Notes: Unless specified, all the test results are measured in 25°C room temperature.

* marked items are optional and contact with sales people to get the functions.

■ Safety/EMC Compliance

Safety Standard	Description
UL8750	Light emitting diode(LED) equipment for use in lighting products
UL1012	Power units other than class 2
IEC 61347-1	Lamp control gear Part 1: general and safety requirements
IEC 61347-2-13	Lamp control gear Part 2-13: particular requirement for d.c. or a.c. supplied electronic control gear for LED modules
EMI Standards	Description
IEC 55015	Conducted emission test & radiated emission test
IEC 61000-3-2	Harmonic current emissions; Class C
IEC 61000-3-3	Voltage fluctuations & flicker
FCC Part 15	ANSI C63.4:2009 Class B
EMS Standards	Description
IEC 61000-4-2	Electrostatic discharge (ESD): 8 kV air discharge, 4 kV contact discharge
IEC 61000-4-3	Radio frequency electromagnetic field susceptibility test (RS)
IEC 61000-4-4	Electrical fast transient (EFT)
IEC 61000-4-5	Surge immunity test
IEC 61000-4-6	Conducted radio frequency disturbances test (CS)
IEC 61000-4-8	Power frequency magnetic field test
IEC 61000-4-11	Voltage dips
IEC 61547	Electromagnetic immunity requirements applies to lighting equipment


■ Dimming

Parameter	Min.	Typ.	Max.
Vdim Sourcing Current	200uA	300uA	450uA
Vdim Allowed Input Voltage	-20 V		20 V
0-10V Dimming Range	10% (Vdim=1V)	Linear	100% (Vdim=9~10V)
PWM Dimming Range	10% (Duty=10%)	Linear	100% (Duty=90-100%)
Dim off threshold	0.4V or 4%	0.5V or 5%	0.6V or 6%
Dim on threshold	0.6V or 6%	0.7V or 7%	0.8V or 8%
PWM High	3.8V		10V
PWM Low	0V		0.6V
PWM Frequency	300Hz		2kHz
External PWM Controller Current Sinking Capability	300uA		
DALI Interface Standard		IEC62386	
DA1,DA2 High Level	9.5	16	22.5
DA1,DA2 Low Level	-6.5	0	6.5
DA1,DA2 Current	0		2mA


- Dimming Curve

a. Without dim-off

0-10V Dimming Curve

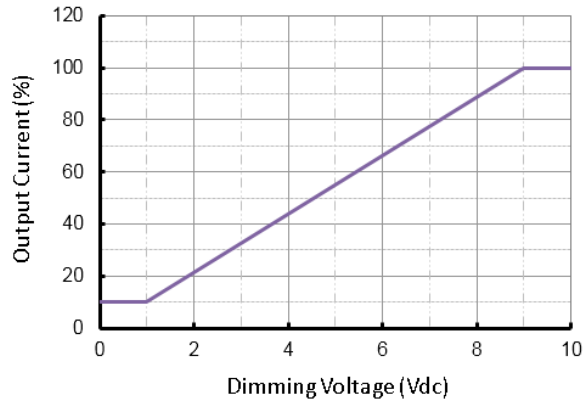


PWM Dimming Curve

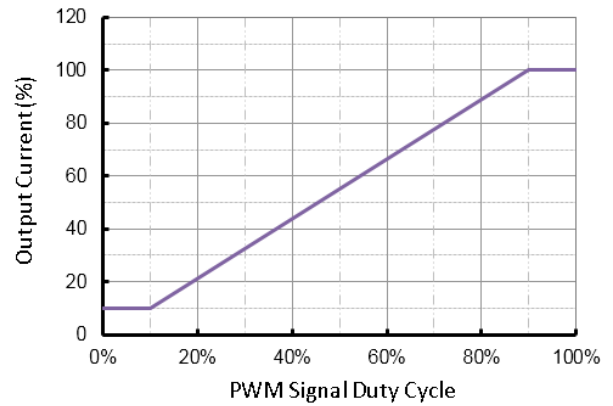


b. With dim-off


0-10V Dimming Curve

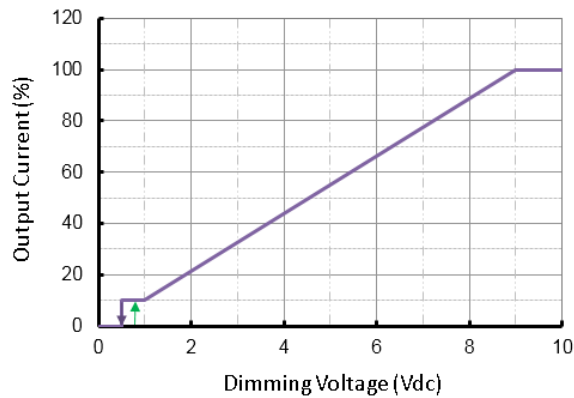


PWM Dimming Curve

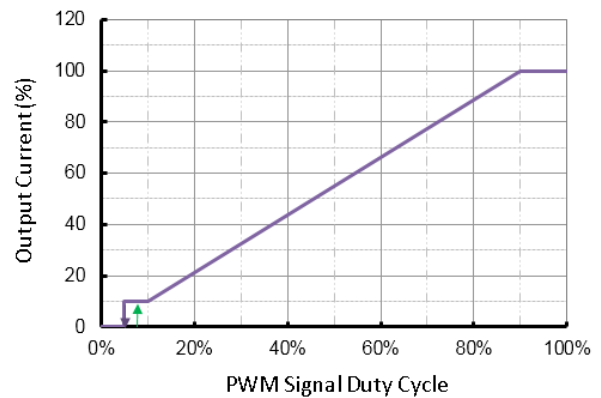

- Dimming Wiring

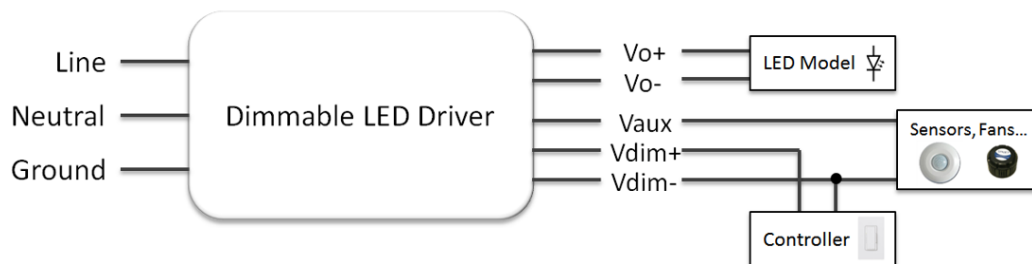


■ Lifetime vs. Case Temperature

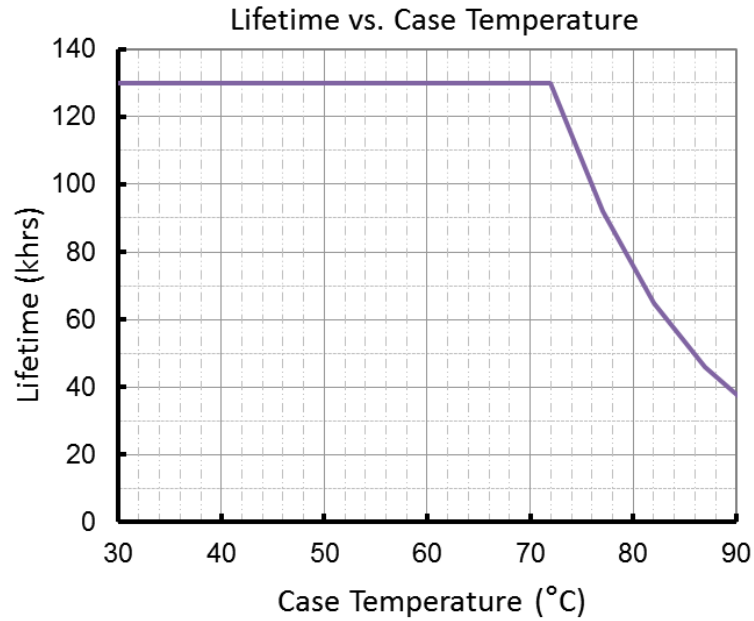


(End of Life: Maximum Failure Rate=10%)


■ Power Factor vs. Load

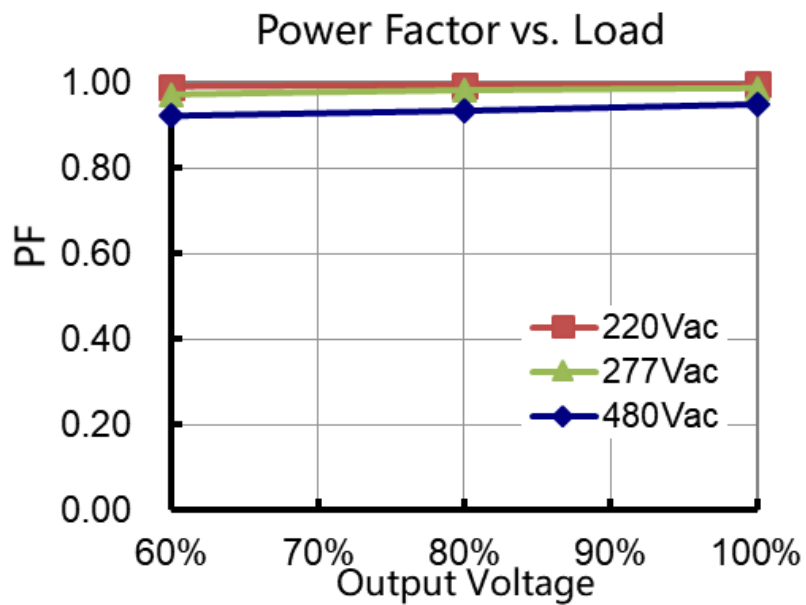

■ THD vs. Load

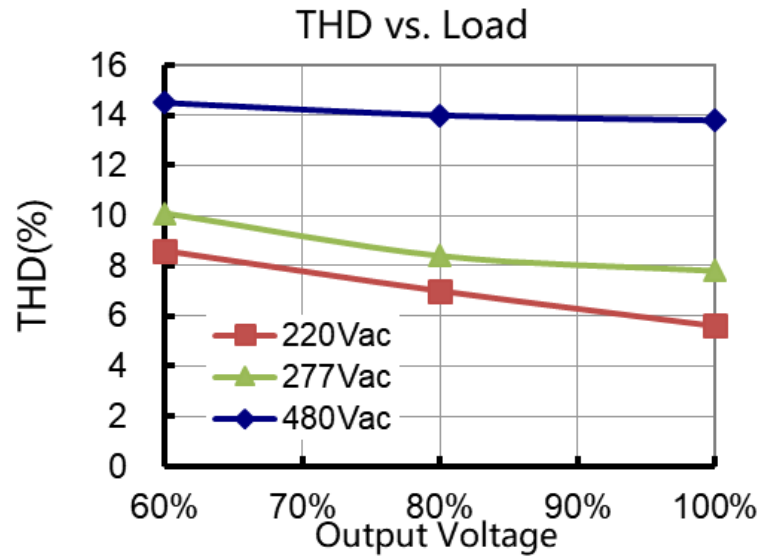


■ Efficiency vs. Load

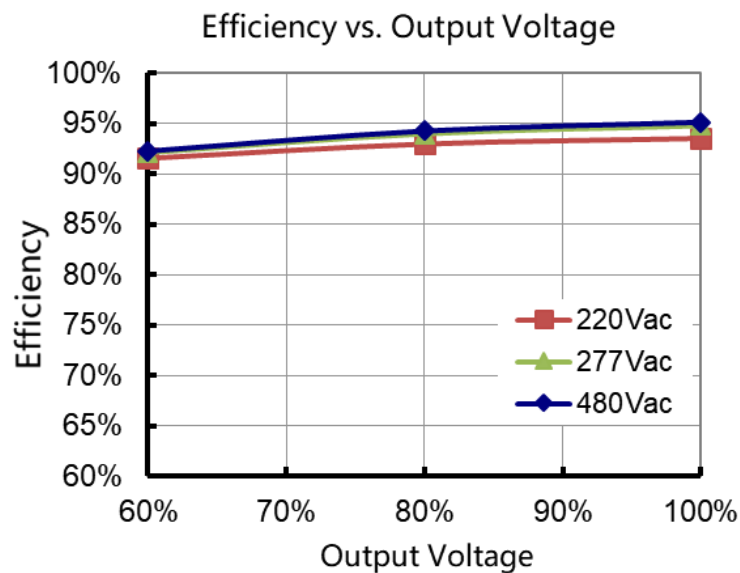


■ Mechanical Design


- TLD-600-Cxxx-NNU/TRU

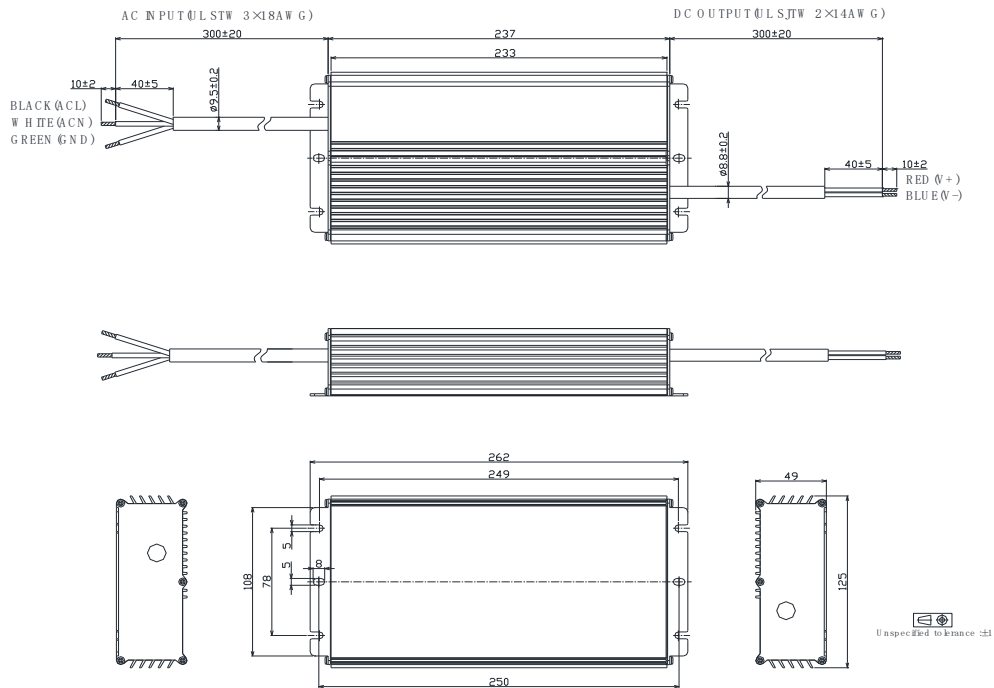


- TLD-600-Cxxx-DNU/DRU

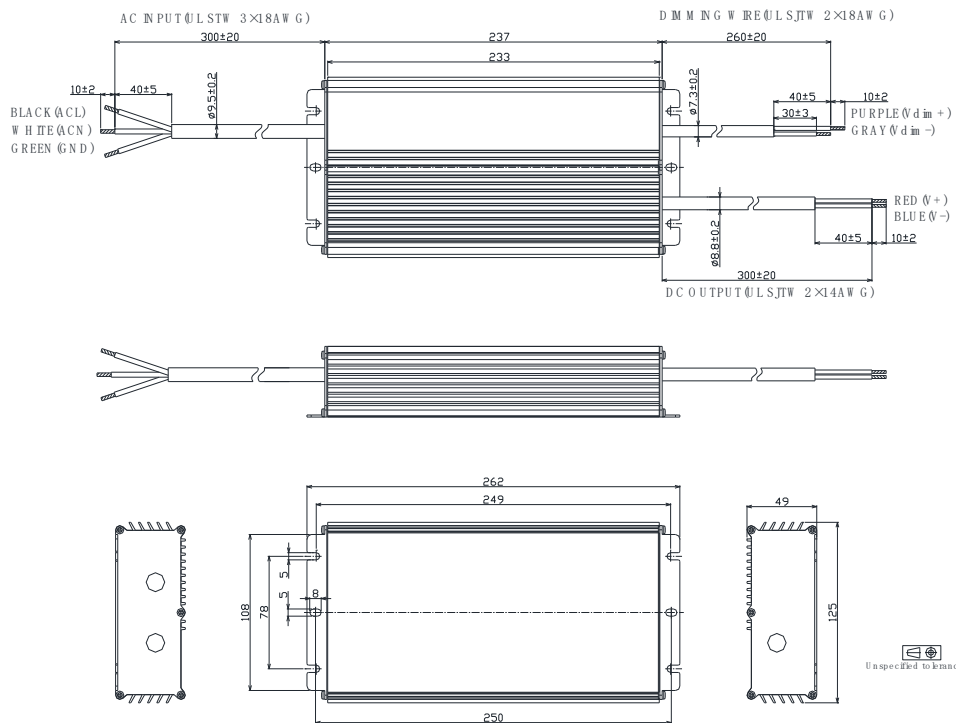

- TLD-600-Cxxx-ANU/ARU

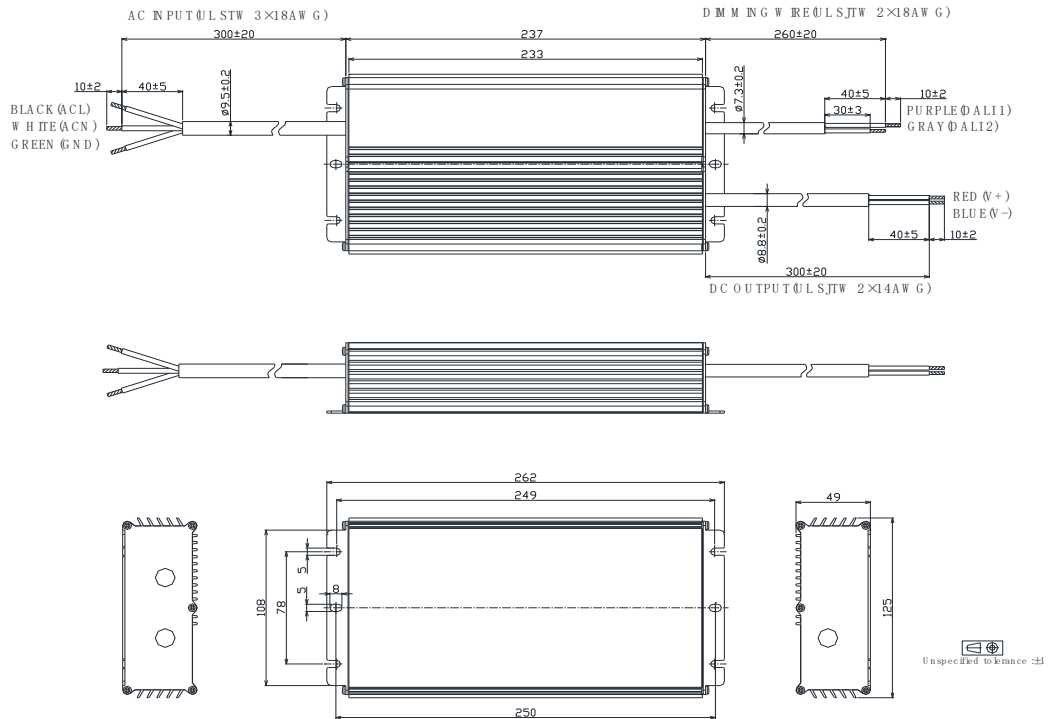


- TLD-600-Cxxx-ENU/ERU

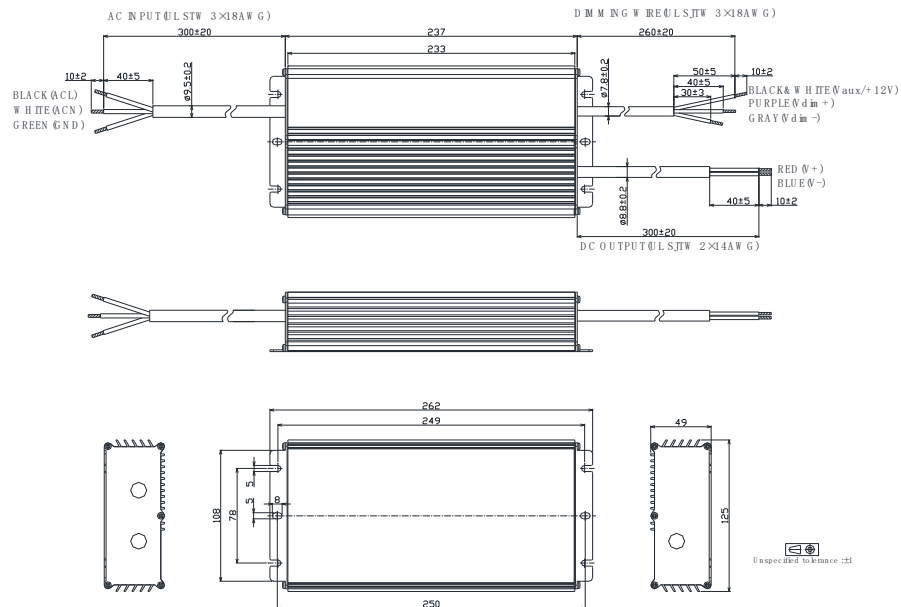


600W, 220-480Vac Input, Isolated Dimming Interface


- TLD-600-Cxxx-MRU

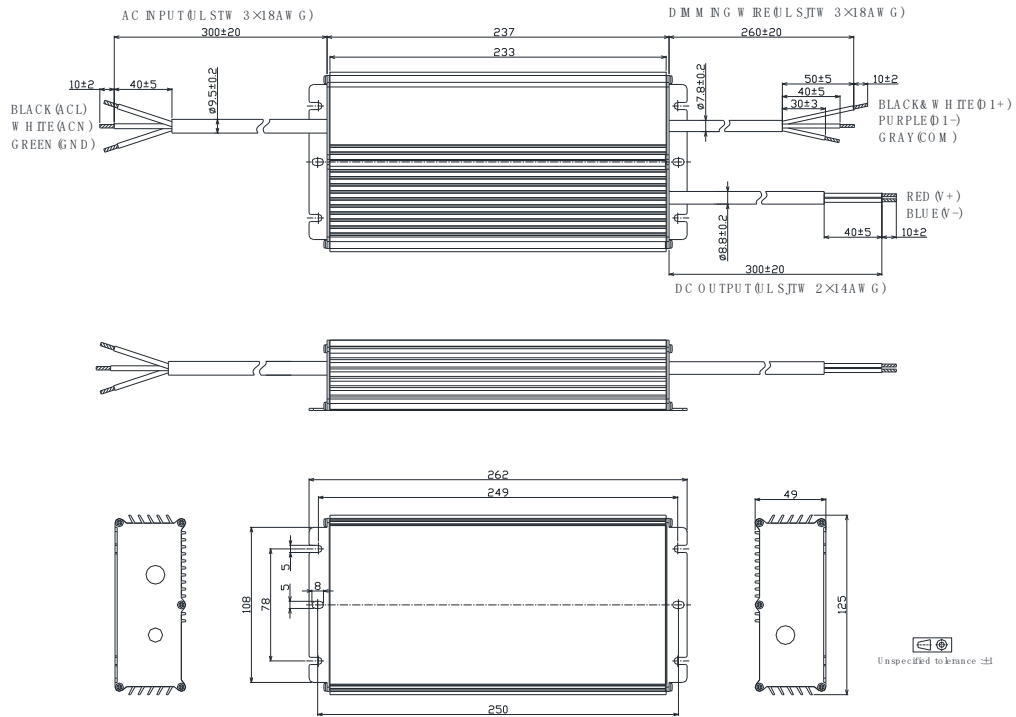


- TLD-600-Cxxx-NNS/TRS

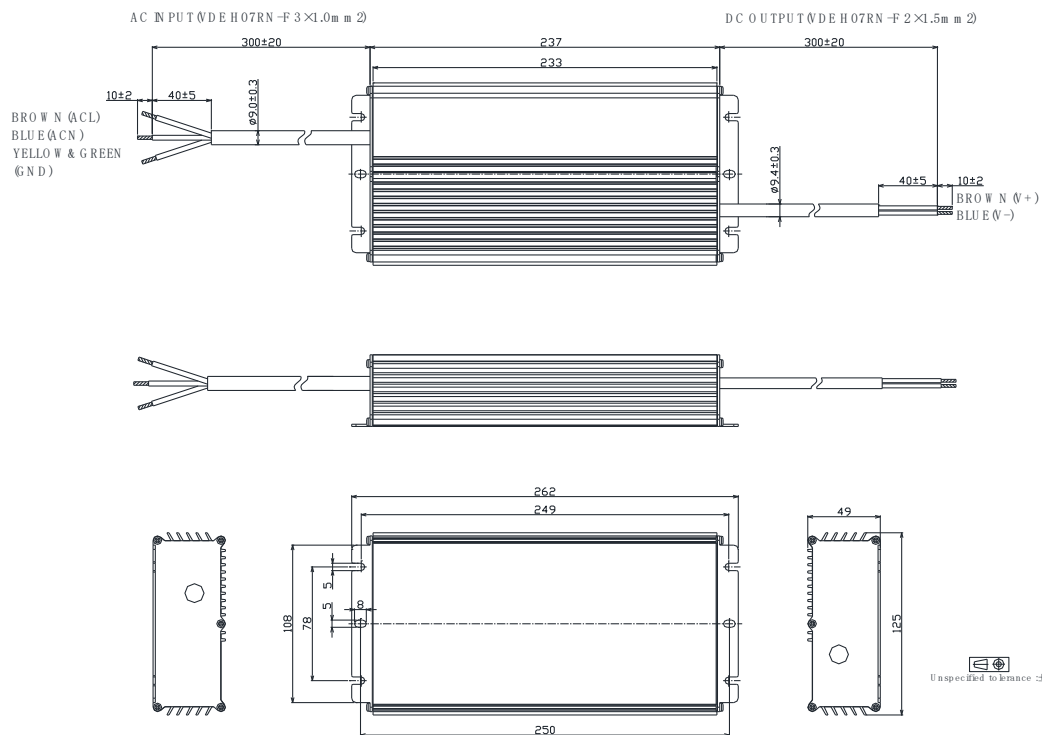

- TLD-600-Cxxx-DNS/DRS

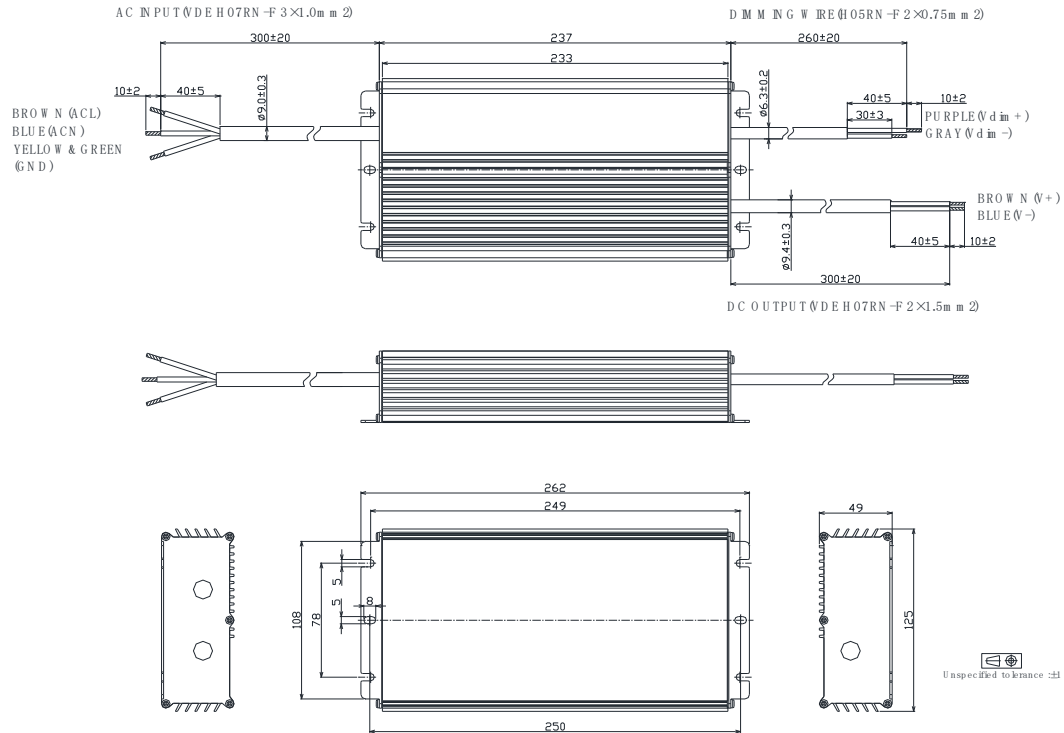


- TLD-600-Cxxx-ANS/ARS

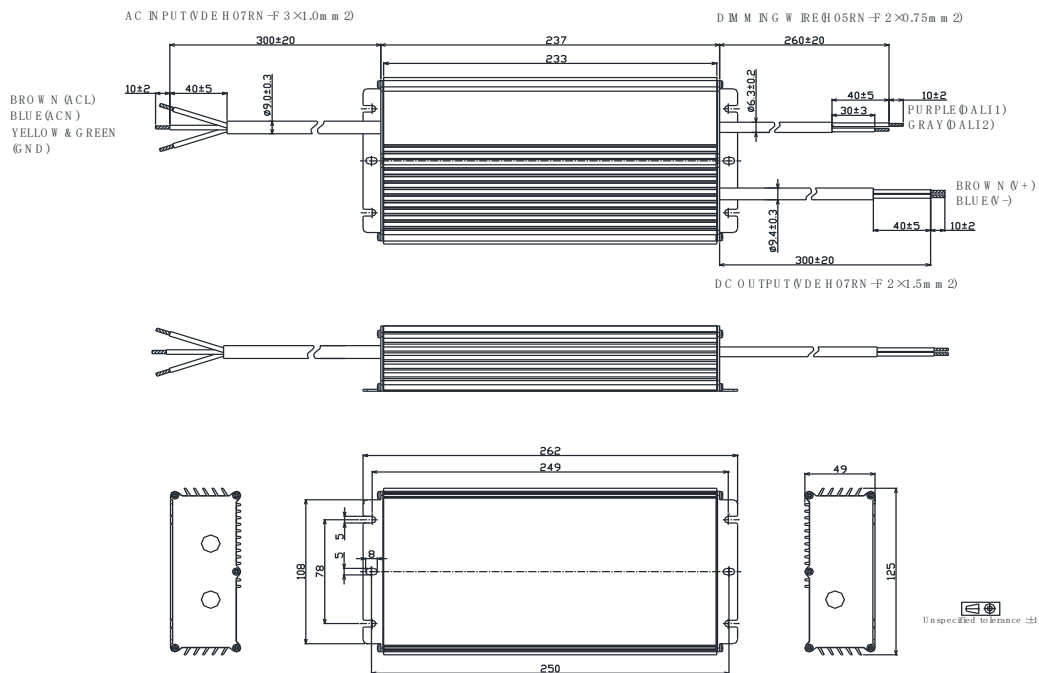


600W, 220-480Vac Input, Isolated Dimming Interface

- TLD-600-Cxxx-ENS/ERS

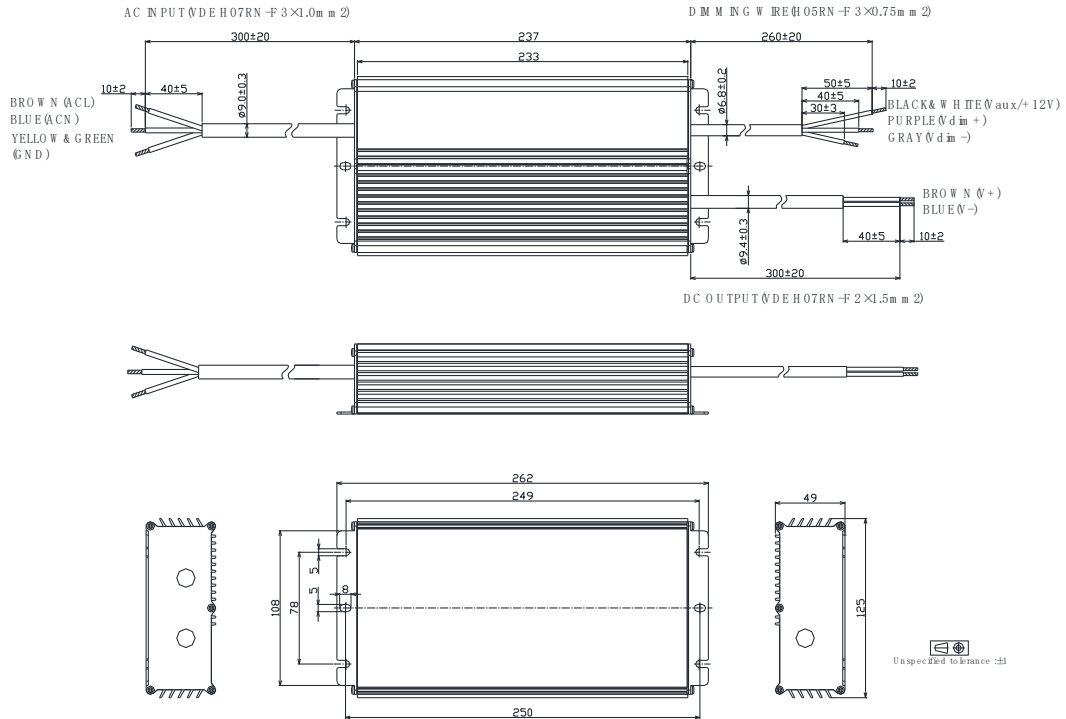

- TLD-600-Cxxx-MRS

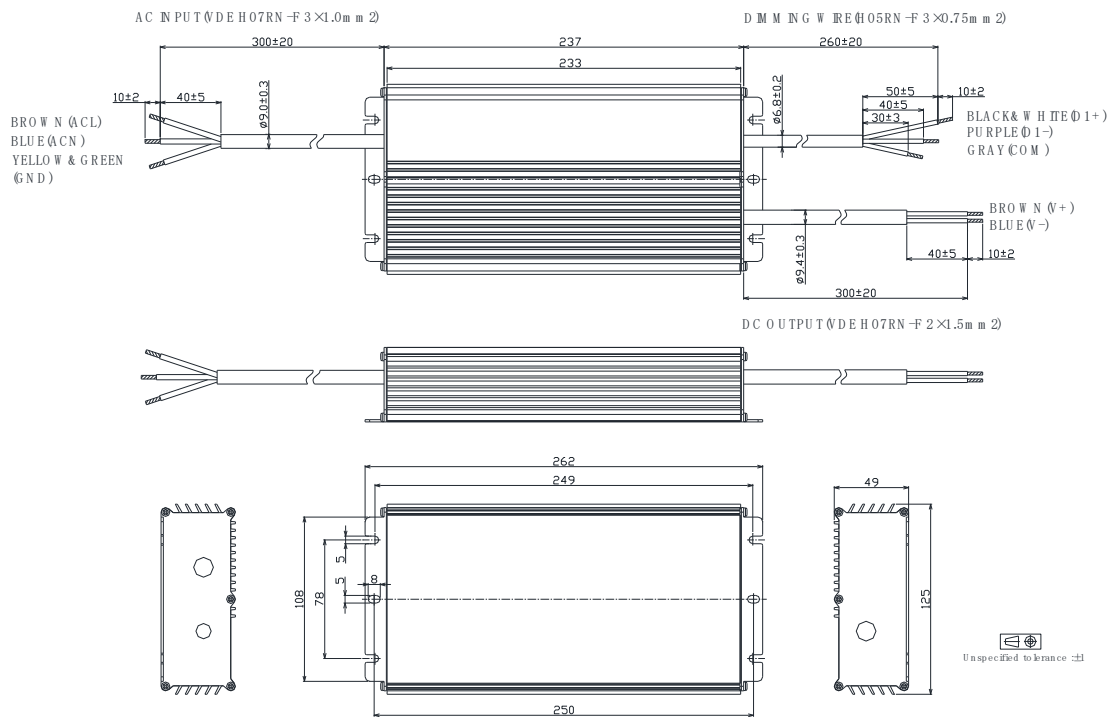

■ Appendix – Operation Range

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C12A	12500	600	29	48	1250
	12000	600	30	50	1200
	11500	600	31	52	1150
	11000	600	33	55	1100
	10500	600	34	57	1050
	10000	600	34	60	1000
	9500	570	34	60	1000
	9000	540	34	60	1000

	1000	60	34	60	1000

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C860	8600	600	42	70	860
	8500	600	42	71	850
	8400	600	43	71	840
	8200	600	44	73	820
	8000	600	45	75	800
	7800	600	46	77	780
	7600	600	47	79	760
	7400	600	49	81	740
	7200	600	50	83	720
	7000	600	51	86	700
	6800	600	53	88	680
	6600	600	55	91	660
	6400	600	56	94	640
	6200	600	58	97	620
	6000	600	60	100	600
	5800	580	60	100	600
	5600	560	60	100	600

	600	60	60	100	600

600W, 220-480Vac Input, Isolated Dimming Interface

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C600	6000	600	60	100	600
	5800	600	62	103	580
	5600	600	64	107	560
	5400	600	67	111	540
	5200	600	69	115	520
	5000	600	72	120	500
	4800	600	75	125	480
	4600	600	78	130	460
	4400	600	82	136	440
	4200	600	86	143	420
	4000	571	86	143	420
	3800	543	86	143	420
	3600	514	86	143	420
	3400	486	86	143	420
	3200	457	86	143	420
	3000	429	86	143	420

	420	60	86	143	420

Model	Typical Set Output Current (mA)	Max Output Power (W)	Output Voltage Min (V)	Output Voltage Max(V)	Minimum Dimming Current (mA)
-C420	4200	600	86	143	420
	4100	600	88	146	410
	4000	600	90	150	400
	3900	600	92	154	390
	3800	600	95	158	380
	3700	600	97	162	370
	3600	600	100	167	360
	3500	600	103	171	350
	3300	600	109	182	330
	3100	600	116	194	310
	3000	600	120	200	300
	2900	600	124	207	290
	2800	600	129	214	280
	2700	579	129	214	280
	2600	557	129	214	280

	280	60	129	214	280